Datasheet

Q_{gs}	Gate source charge	-	60	-	nC	V_{DS} = 500V, V_{GS} = -4/+20V, I_D = 30A

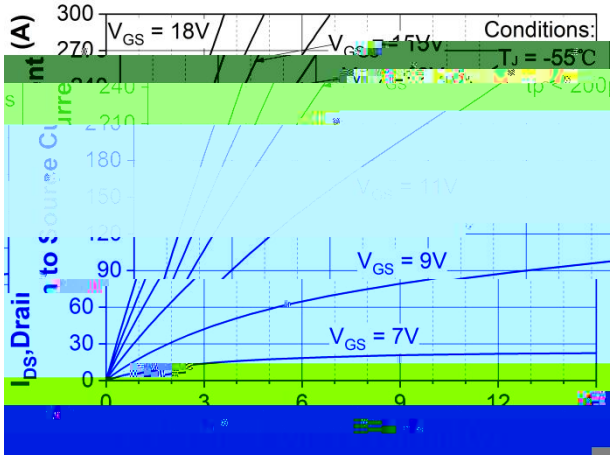


Figure 1. Output characteristics T_J = -55 ºC

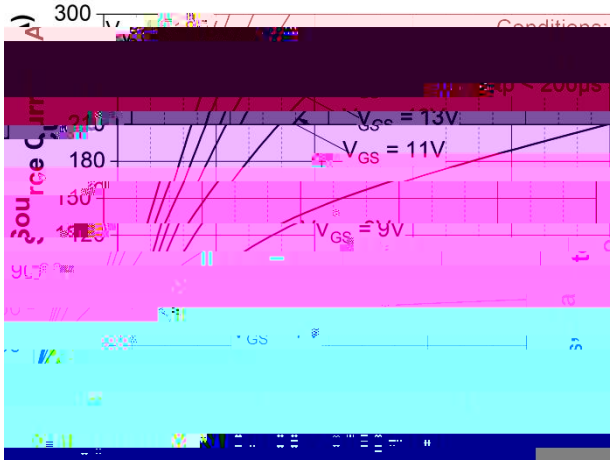


Figure 2. Output characteristics T_J = 25 ºC

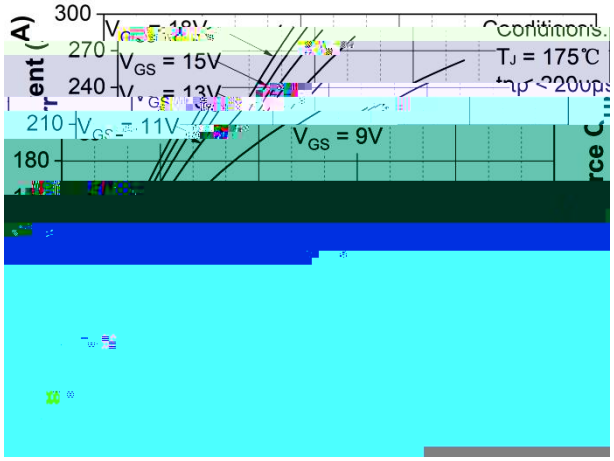


Figure 3. Output characteristics T_J = 175 ºC

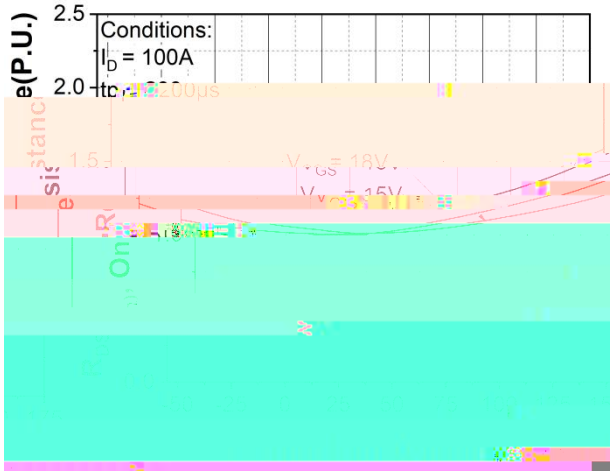


Figure 4. Normalized on-resistance vs. temperature

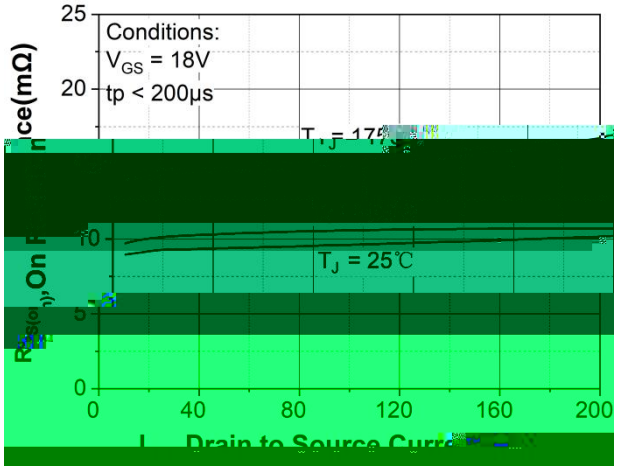


Figure 5. On-resistance vs. drain current for various temperatures

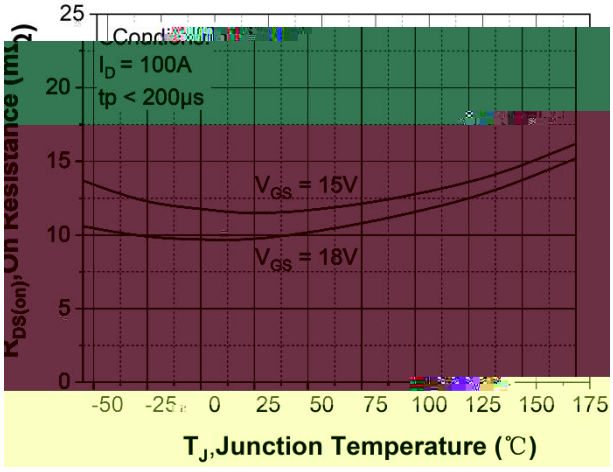
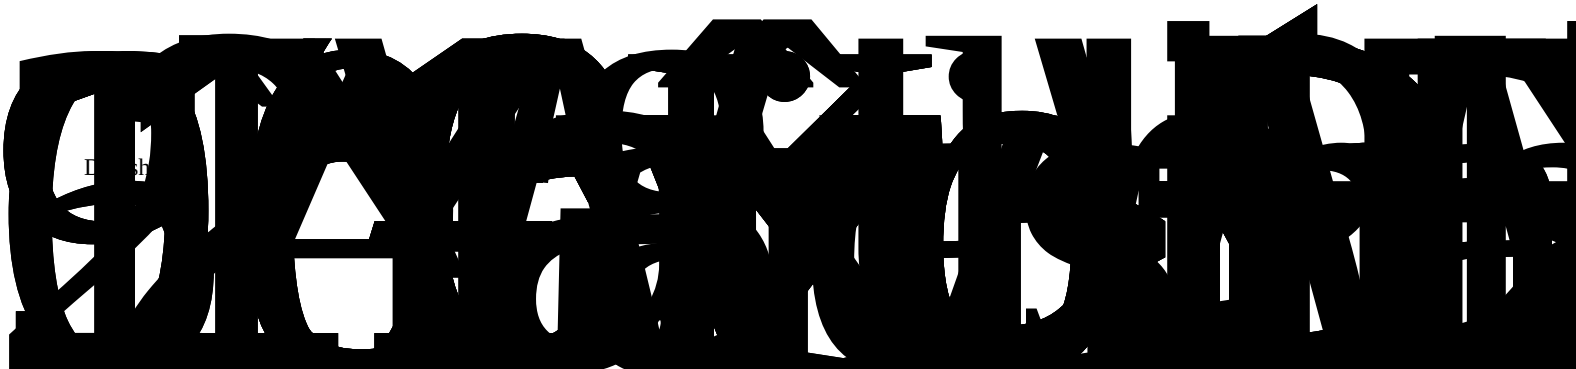


Figure 6. On-resistance vs. temperature for various gate voltages



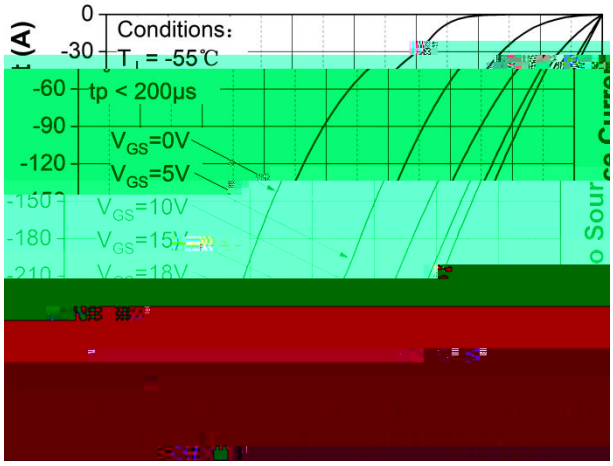


Figure 13. 3rd quadrant characteristic at T_J = -55 ºC

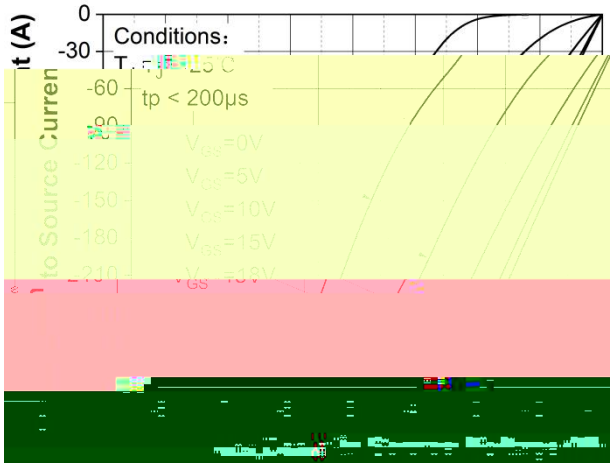


Figure 14. 3rd quadrant characteristic at T_J = 25 ºC

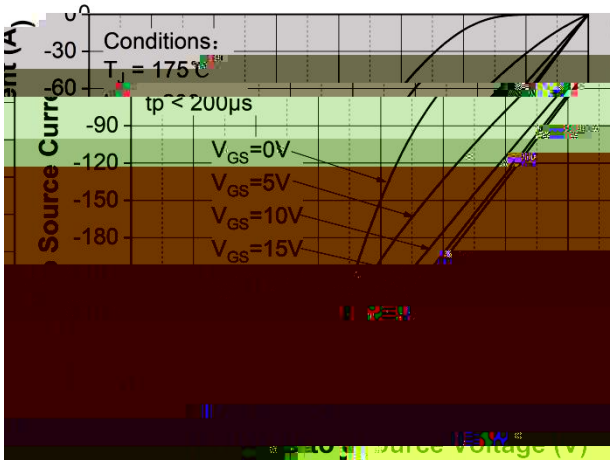


Figure 15. 3rd quadrant characteristic at T_J = 175 ºC

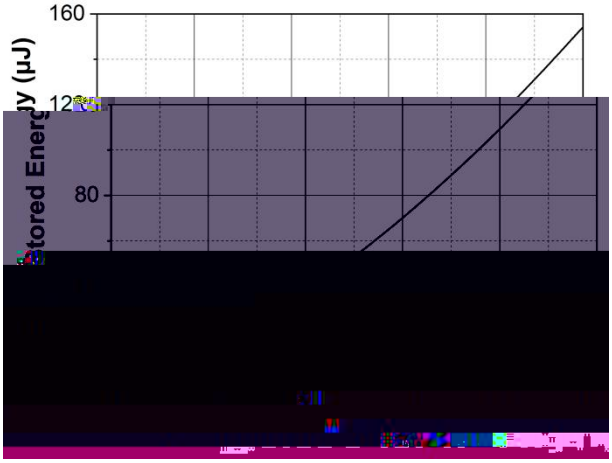


Figure 16. Output capacitor stored energy

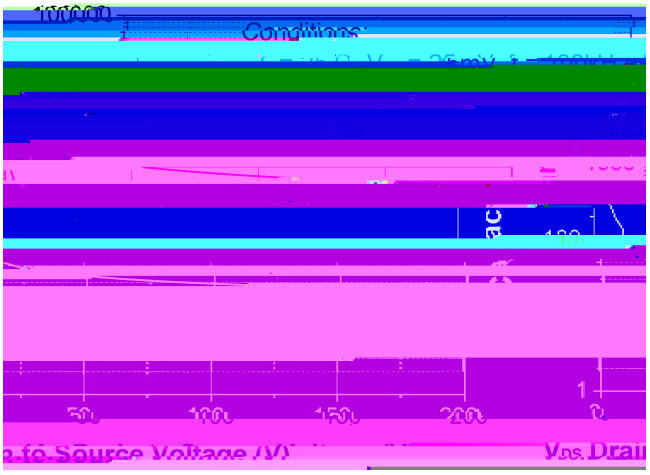


Figure 17. Capacitances vs. drain-source voltage (0 - 200V)


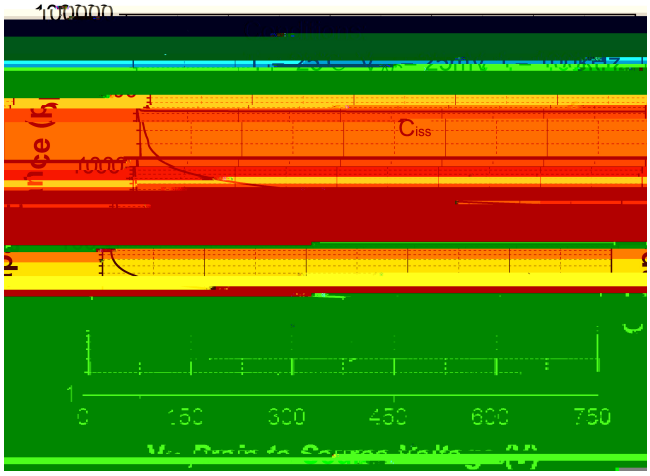


Figure 18. Capacitances vs. drain-source voltage (0 - 750V)

Die size W x L	5 * 5	mm	
Gate pad size W x L	0.78 * 0.68	mm	
Source pad size W x L	1.9 * 3.1	mm	
Kelvin pad size W x L	1.25 * 0.70	mm	
Die thickness	130 ± 20	μm	
Top side gate & kelvin source metallization	4	μm	AlCu
Top side power source metallization	4/4/0.35/0.05	μm	AlCu/Ni/Pd/Au
Back side drain metallization	1	μm	Ag

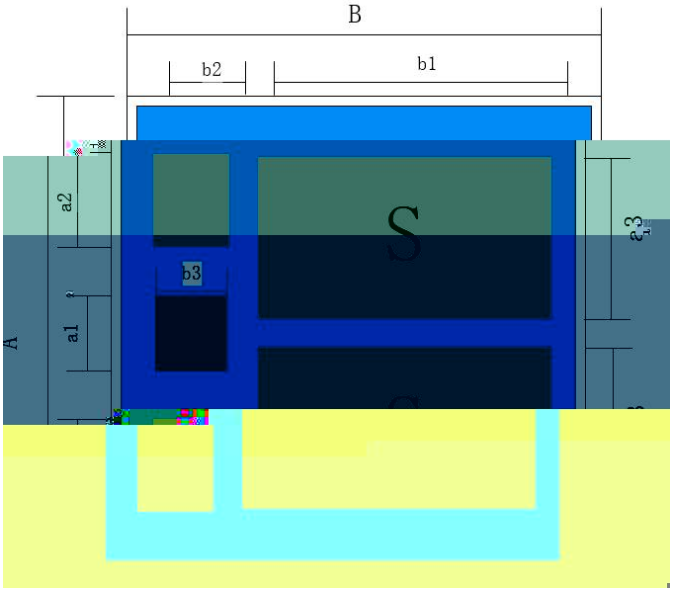

Symbol	Dimension / mm
B	5
b1	3.1
b2	0.7
b3	0.68
A	5
a1	0.78
a2	1.25
a3	1.9

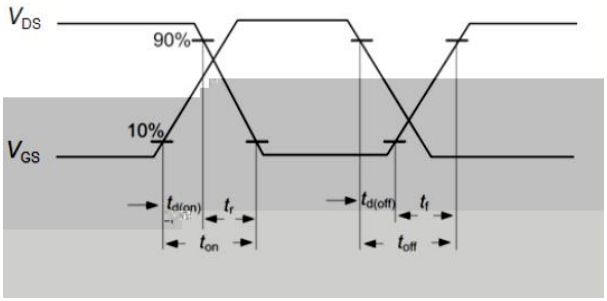


Figure A. Definition of switching times

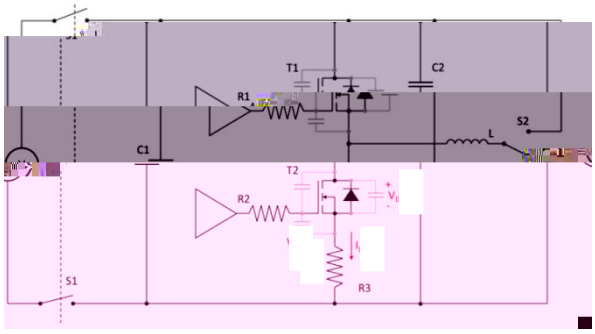


Figure B. Dynamic test circuit

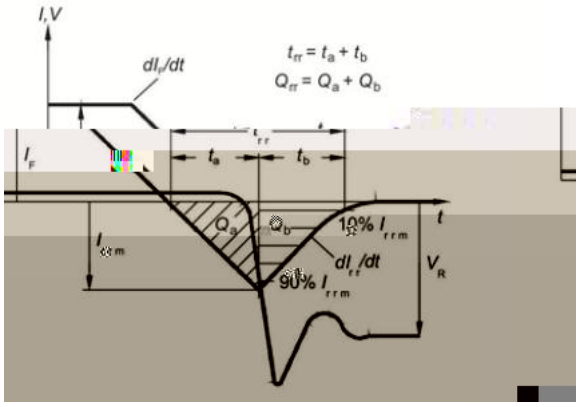


Figure C. Definition of body diode

į B

			--



6. Due to technical requirements products may contain dangerous substances. For information on the types in question please contact Sichain office.

7. Except as otherwise explicitly approved by Sichain in a written document signed by authorized representatives of Sichain, Sichain' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

8. For use of our products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a Sichain representatives, for example but not limited to: transportation equipment,primary communication equipment,traffic lights,fire/crime prevention, safety equipment, medical systems, and power transmission systems.